

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
2 May 2002 (02.05.2002)

PCT

(10) International Publication Number  
WO 02/34124 A2

(51) International Patent Classification<sup>7</sup>: A61B 1/00

(21) International Application Number: PCT/EP01/11988

(22) International Filing Date: 16 October 2001 (16.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/242,271 20 October 2000 (20.10.2000) US  
09/956,363 19 September 2001 (19.09.2001) US

(71) Applicant: ETHICON GMBH [DE/DE]; Robert-Koch-  
Strasse 1, 22851 Norderstedt (DE).

(72) Inventor: LANDGREBE, Susanne; Zuckerhut 3, 23867  
Sülfeld (DE).

(74) Agents: BOTH, Georg et al.; Uexküll & Stolberg, Besel-  
erstrasse 4, 22607 Hamburg (DE).

(81) Designated States (*national*): AF, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

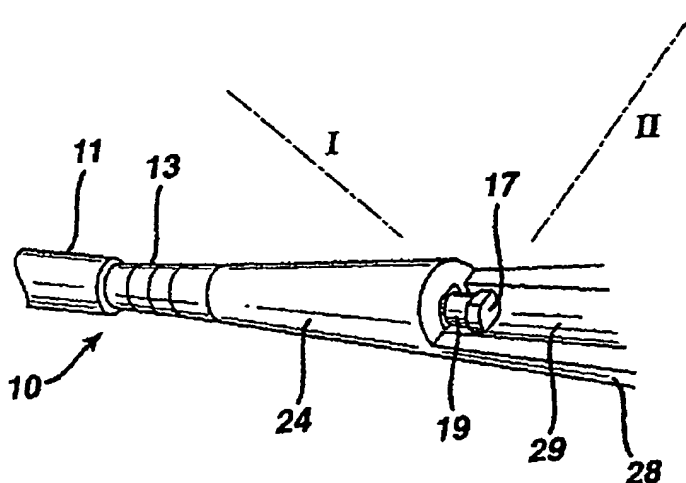
(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

*without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: SYSTEM WITH A SURGICAL NEEDLE AND A HANDLE



(57) Abstract: In a system with a surgical needle (10) and a handle (20), the surgical needle (10), in its proximal end region opposite the needle tip, comprises a support section which is adapted to be pushed in the handle (20). The handle (20) includes a lumen adapted to support the support section of the surgical needle (10) and a locking means (30, 26), which can be adjusted from a locking position, in which the support section is secured to the handle (20), to a release position, in which the support section can be pulled out of the lumen.

WO 02/34124 A2

## SYSTEM WITH A SURGICAL NEEDLE AND A HANDLE

### 5 Cross Reference to Related Application

The present invention claims the benefit of earlier-filed United States provisional patent application, serial number 60/242,271, filed on October 20, 2000, which is hereby incorporated by reference in its entirety herein.

### 10 Field of the Invention

The invention relates to a system with a surgical needle and a handle.

### Background of the Invention

There are surgical operation techniques in which thick or very thick surgical  
15 needles are used, e.g., needles having a diameter from 2 mm to 7 mm. For example, such needles are used in order to insert a band or tape below the urethra of a patient for treatment of stress incontinence as disclosed in U.S. Patent No. 5,899,909 and United States patent application 09/ [AA]??, both incorporated by reference herein in their entirety.

20 When the needle is guided through tissue, considerable forces occur. In handling the needle, the surgeon can use a needle holder or a gripper-like surgical instrument as an aid, but, as a rule, he has to re-apply this instrument to the needle often, which is not convenient. Moreover, unfavorable lever ratios can occur, in particular if the instrument runs oblique with respect to the needle.

25

### Summary of the Invention

It is an object of the invention to provide a possibility for facilitating the handling of a surgical needle, in particular of a thick surgical needle.

30 The system according to the invention includes a surgical needle and a handle. The surgical needle comprises, in its proximal end region opposite the needle tip, a support section, which is adapted for pushing into the handle. The handle comprises a lumen adapted for holding the support section of the surgical needle and a locking means. The locking means can be switched from a locking

position, in which the support section is fixed to the handle, to a release position, in which the support section can be pulled out of the lumen.

When the support section is locked or fixed at the handle, the surgical needle is rigidly and securely connected to the handle. In this state, the handle appreciably facilitates the handling of the needle. For example, by means of the handle, the needle can be held and easily guided through the tissue of the patient. The suture material, tape or a similar object, which is to be pulled through the tissue by means of the needle, can be attached to the shaft of the surgical needle in between the support section and the needle tip, preferably close to the support section, by means of a shrink tubing or other attachment and detachment means as is disclosed in United States Patent 6,273,852 B1, incorporated by reference herein in its entirety. If shrink tubing is used as the attachment means, the surgical needle preferably comprises an attachment section for suture material, a tape or similar means, distal to the support section, e.g. a corrugated section of the shaft which can also be provided with a step at which the shrink tubing engages in order to enable a continuous transition between the shaft and the suture material, the tape or similar means.

When using the invention for the method disclosed in the 5,899,909 patent, after the needle has penetrated the abdomen the needle tip can be grasped by the surgeon by hand (or with a conventional instrument). At this moment, the locking means can be switched from the locking position to the release position, such that the needle can be pulled out of the handle non-abruptly and with a small force effort (or, vice versa, the handle can be retracted from the needle). After releasing the handle, the needle with the suture material, tape or similar means attached to the needle can be completely pulled through the tissue.

The surgical needle can have a diameter of 2 mm to 7 mm, but a different diameter is conceivable as well. Certainly, as is known to those skilled in the art, the surgical needle may take on any variety of cross-sections.

Preferably, the support section of the surgical needle, in its cross-section, at least in a partial region deviates from a circular shape, and the lumen, in its cross-section, is adapted to the support section for securing the surgical needle against torsion. This design enables a torsion-proof connection of the needle to the handle in a simple manner.

In an advantageous version of the invention, the lumen starts at an opening in the distal end region of the handle, and the support section of the surgical needle is adapted to a longitudinal insertion into this opening. The support section of the surgical needle comprises a depression, into which, in the locking position, engages a locking element provided at the locking means of the handle. The locking means comprises a sleeve rotatably mounted in the lumen of the handle. In this preferred embodiment, there is provided at the proximal end of the support section of the surgical needle adjacent to the depression of the support section, a locking protrusion having a non-circular cross-sectional shape.

10 The sleeve of the locking means is rotatable around the longitudinal axis of the lumen from the locking position into the release position and comprises a plate-like locking element having an opening which can be passed by the locking protrusion in the release position, but not in the locking position. Preferably, the locking element is located in the distal end region of the sleeve. The sleeve can

15 be coupled to an actuating lever, which essentially runs in radial direction, the free end of the actuating lever preferably extending through an opening in the handle, which opening allows a rotational movement of the actuating lever and sleeve. The handle can include an engagement means for securing the actuating lever in the locking

20 position.

This preferred embodiment of the invention allows a convenient and safe handling of the surgical needle with one hand. If required, the actuating lever can be moved into the release position, e.g., by means of the thumb, such that the surgical needle can be released from the handle with a small force and virtually

25 without a jerk. Thus, the surgeon requires one hand only in order to operate the system. Another advantage of this embodiment is that it can be immediately recognized by means of the position of the actuating lever whether the locking means is in the locking position or the release position.

Preferably, the handle is made from synthetic material and can be

30 designed as a disposable article. Preferably, the handle has a two-part casing such that the locking means can be easily assembled.

In a preferred embodiment of the invention, the handle, in the area of its proximal end, comprises at least one broadening structure, e.g., two protrusions,

which extend into opposite directions and transversely with respect to the surgical needle, which protrusions enable the handle to rest conveniently in the surgeon's palm or ball of the thumb. The handle can additionally comprise at least one finger application structure, e.g. two wing-like structures extending into opposite  
5 directions, which run in parallel to the broadening structures and by means of which the surgeon, e.g. using the index finger and the middle finger, can pull the handle onto his palm such that it securely rests in his hand. Another advantage of this embodiment becomes apparent when the needle is curved. In this case the surgeon can recognize the direction of the leading (distal) end of the needle area  
10 in relation to the position of the broadening structure or the finger application structure.

These and other features and advantages of the present invention will become apparent from the following more detailed description, when taken in conjunction with the accompanying drawings which illustrate, by way of example,  
15 the principles of the invention.

#### Brief Description of the Drawings

In the following, the invention is explained in more detail by means of embodiments.

20 Figure 1 is a perspective view of the proximal end region of the surgical needle in an embodiment of the system according to the invention;

Figure 2 is a perspective view of the handle in the embodiment of the system according to the invention;

Figure 3 is a perspective view of the distal region of the handle when the casing is opened and the surgical needle is inserted;  
25

Figure 4 is a perspective view of the locking means of the handle in the embodiment of the system according to the invention;

Figure 5 is a perspective view of the lower casing part of the handle with the locking means inserted;

30 Figure 6 is a detailed view of the locking handle;

Figure 7 is an elevation view of the distal end face of the sleeve of the locking means;

Figure 8 is a schematic longitudinal sectional elevation view illustrating the release position of the locking means, the plane of the paper being given by the direction of the axis I from Figure 3;

Figure 9 is a schematic longitudinal sectional elevation view illustrating the locking position of the locking means, the plane of the paper being given by the direction of the axis II from Figure 3;

Figure 10 a perspective view of the handle of a second embodiment of the system according to the invention;

Figures 11a-d are several views of a third embodiment of the system according to the invention, i.e. (a) an elevation view from the distal end of the handle (b) a plan view of the handle, (c) an elevation view, and (d) a schematic exploded view; and

Figure 12a-d are several views of a fourth embodiment of the system according to the invention, i.e. (a) an elevation view from the distal end of the handle, (b) a plan view of the handle, (c) an elevation view from the proximal end of the handle, and (d) an elevation view.

#### Detailed Description of the Preferred Embodiment

Before explaining the present invention in detail, it should be noted that the invention is not limited in its application or use to the details of construction and arrangement of parts illustrated in the accompanying drawings and description, because the illustrative embodiments of the invention may be implemented or incorporated in other embodiments, variations and modifications, and may be practiced or carried out in various ways. Furthermore, unless otherwise indicated, the terms and expressions employed herein have been chosen for the purpose of describing the illustrative embodiments of the present invention.

Figure 1 illustrates in a perspective view the proximal end region of a surgical needle 10, which is one component of an embodiment of the system with a surgical needle and a handle. The needle tip, which is located at the distal end of the needle 10, is not shown in Figure 1. A shaft 11, joins to the needle tip. In its proximal end region, the needle 10 comprises a support section 12.

An attachment section 13, which, in the embodiment, has a conical basic shape (the diameter increasing in the proximal direction) and is provided with a

corrugation 14, is located between the shaft 11 and the support section 12. At the transition between the shaft 11 and the attachment section 13, there is formed a step or shoulder 15. At the attachment section 13, e. g. a tape can be attached, e.g. by means of shrink tubing, which is to be secured in the tissue of a patient by means of the surgical needle 10. The step 15 provides for a smooth change of the cross-section between the needle 10 and the shrink tubing or the tape at the transition site. Alternative means may be provided to attach the tape at both the proximal end and the distal end of the needle 10.

The support section 12 has a cross-sectional shape with two flat portions, from which one can be seen in Figure 1 and is designated by 16. A locking protrusion 17, the cross-sectional shape of which coincides to that in the distal region of the support section 12, is located at the proximal end of the support section 12; the cross-sectional shape corresponds to the area 34 in Figure 7. The locking protrusion 17 has two flat portions as well, from which one is designated by 18 and can be seen in Figure 1. Adjacent to the locking protrusion 17 in distal direction, there is a depression 19. In the embodiment, the cross-sectional shape of the needle 10 is circular in the area of the depression 19, the diameter corresponding to the distance between both flat portions 18 of the locking protrusion 17.

Preferably, the surgical needle 10 is integrally made and, in the region of the shaft 11 and the needle tip, can have any form suitable to the desired application.

Figures 2 and 3 illustrate a handle 20, which is another component of the system. In the area of its proximal end, the handle 20 is provided with two broadening structures 22, which cause the handle to rest well in a surgeon's hand. A duct or lumen, into which the support section 12 of the needle 10 can be pushed, is located in the distal end region 24 of the handle 20, as explained below in detail. In the views according to Figures 2 and 3, the needle 10 is inserted in the handle 20 such that only the attachment section 13 and the shaft 11 only of the needle 10 are not inserted into the handle 20. In the middle area of the handle 20, an actuating lever 26 functions as a locking means for easily locking and unlocking the needle 10, as discussed below. In the embodiment, the handle 20 is made from synthetic material and has a casing with a lower casing

part 28 and an upper casing part. It is designed as a disposable article. A reusable handle, however, is conceivable as well.

Figure 3 shows the distal region of the lower casing part 28 with a surgical needle 10 inserted. The lower casing part 28 includes, in its distal end region 24, a lumen running in the longitudinal direction of the handle 20, which lumen is closed in circumferential direction and open at the distal end face of the handle 20 and at the proximal end of the lumen. The cross-sectional shape of this lumen is adapted to that of the support section 12, its length corresponds to that of the flat portion 16. Thus, the support section 12 of the needle 10 can be pushed into the lumen from the distal end face of the handle 20 and thereafter section 12 is supported in the lumen in a torsion-proof manner. As can be seen in Figure 3, the depression 19 and the locking protrusion 17 are external to the lumen when the needle 10 is inserted into handle 20.

Joining to the lumen in proximal direction, there is formed a channel 29 in the lower casing part 28, as indicated in Figure 3. The channel 29 is accessible when the casing of the handle 20 is opened. In the assembled state of the handle, a sleeve 30 (see Figure 4) is mounted between the channel 29 and a similarly designed channel in the upper casing 38 (Fig. 6) such that the sleeve 30 can be rotated around the longitudinal axis of the channel 29 between a locking position and a release position.

As shown in Figure 4, the sleeve 30 has a circular cross-section. At its distal end face, the sleeve 30 is designed as a plate-like locking element 32, which is provided with an opening 34. The opening 34 (see also Figure 7) is adapted with respect to the shape of the cross-sectional shape of the locking protrusion 17 such that the locking protrusion 17 can pass through the opening 34 if the flat portions 18 and the corresponding flat portions of the opening 34 are aligned with respect to each other. In the assembled state of the handle 20, the distal end of sleeve 30 abuts at the proximal end of the lumen for the support section 12 such that the depression 19 is located in the area of the locking element 32; the thickness of the locking element 32 is adapted to the length of the depression 19.

The actuating lever 26 extends from the proximal end region of the sleeve 30 and runs generally in radial direction. Figure 5 shows the lower casing part 28

of the handle with the sleeve 30 inserted. In the detailed view of Figure 6, the upper casing 38 is shown. It can be recognized that the free end of the actuating lever 26 projects through an opening 39 in the upper casing 38. The opening 39 allows a rotating movement of the actuating lever 26 by about 90° such that, by  
5 adjusting the actuating lever 26, the sleeve 30 can be rotated from the locking position to the release position. In Figure 6, the actuating lever 26 is in the locking position, wherein an engagement protrusion 36 (see Figure 4) is located in a corresponding depression at the upper casing part 38 such that the actuating lever 26 is secured against an unintentional movement. This lock can be  
10 overcome when a larger force is applied such that the actuating lever 26 can be rotated to the release position.

Figure 7 displays the distal end of the sleeve 30 with the locking element 32 and the opening 34.

In Figures 8 and 9, the mode of operation of the locking means is  
15 illustrated. In the state shown in Figure 8, the sleeve 30 is in the release position, wherein the locking element 32 is aligned with respect to the opening 34 and thus fits therethrough. The locking position is shown in Figure 9. It can be recognized that the depression 19 is located in the area of the locking element 32 and that the locking protrusion 17 prevents the needle 10 from being pulled out. The  
20 locking position is achieved by rotating the sleeve 30 by about 90°. It has to be noticed that in the sectional representation according to Figure 9 the plane of the paper has been rotated by 90° as well (see also Figure 3) such that seemingly the needle 10 has been rotated and not the sleeve 30.

Figure 10 shows a variant of the handle, which is designated by 20'. In  
25 addition to both broadening structures 22, the handle 20, has two finger application structures 40 which enable an even more convenient handling. The surgeon can grasp the handle 20' such that the broadening structures 22 are positioned in his palm whereas his index finger and his middle finger grip around the finger application structures 40 and thus slightly press the handle 20 against  
30 the palm. Therefore, the handle 201 rests more economically and safely in, the hand of the surgeon. The actuating lever 26 can be rotated with the thumb of the same hand. Thus, a convenient actuation with one hand is possible.

As explained above, the handle 20 appreciably facilitates the guidance and use of the surgical needle 10 inserted into the handle 20. When the actuating lever 26 is in the locking position, the handle 20 and the needle 10 are firmly connected to each other. If, however, the handle 20 obstructs the further application of the needle 10 and the needle 10 has to be released, the actuating lever 26 can be easily rotated into the release position such that the needle 10 and the handle 20 can be separated by a relative motion in longitudinal direction without problems and jerks.

Figure 11 shows several views of a third embodiment of the system according to the invention, i.e. (a) from the top, (b) from the front, (c) from the side, and (d) in a schematic explosion view. The needle, again designated by 10, is similarly designed as before, whereas the handle, designated by 50, has a particular ergonomic shape with one lateral broadening structure 52 only. The handle 50 comprises two casing parts 54 and 55 inside which a sleeve 56 is mounted in a rotatable manner which is designed similar as in the first two embodiments. An actuating lever 58 is accessible through an opening 59 in the casing part 55 in order to rotate the sleeve 56 from the locking position into the release position.

Figure 12 displays several views of a fourth embodiment of the system according to the invention, i.e. (a) from the top, (b) from the side, (c) from the front, and (d) from below. Again, the needle is designated by 10. The handle, provided with the reference numeral 60, comprises a gripping bow 62 as a broadening structure. The casing is in two-part form again with casing parts 64 and 65. A lever 66 serves as an actuating lever of a rotatable sleeve, which is similarly designed as in the previous embodiments and is not shown in Figure 12. The lever 66 is arranged at the end of the sleeve.

It will be apparent from the foregoing that, while particular forms of the invention have been illustrated and described, various modifications can be made without departing from the spirit and scope of the invention. Accordingly, it is not intended that the invention be limited, except as by the appended claims.

Claims

1. A handle for accepting a surgical needle for use in surgical procedures, the handle comprising:
  - 5 a lumen for accepting a portion of the surgical needle; and
  - locking means having a first position for locking the surgical needle within the lumen and a second position allowing the surgical needle to be placed within or removed from the lumen.
- 10 2. A handle and surgical needle combination for use in surgical procedures, the handle comprising:
  - a lumen for accepting a portion of the surgical needle; and
  - a locking means having a first position for locking the surgical within the lumen and a second position allowing the surgical needle to be placed within or removed
  - 15 from the lumen; and the needle comprising:
    - a first portion having a circular cross-sectional area;
    - a second portion having a noncircular cross-sectional area for insertion into the lumen.
- 20 3. The combination of claim 2 wherein the lumen has in part a cross-sectional shape adapted to receive the second portion for securing the surgical needle against rotational motion.
4. The combination of claim 2, wherein the lumen has an opening at the distal
- 25 end of the handle and the section portion of the surgical needle is adapted to longitudinally insert into the lumen.
5. The combination of claim 2, wherein the second portion of the surgical needle comprises a depression, which engages, in the first position, a locking
- 30 element provided at the locking means.
6. The combination of claim 5, wherein the locking means comprises, in an interior space of the handle, a rotatably mounted sleeve.

7. The combination of claim 6, wherein the locking element is positioned at the distal end region of the sleeve.
- 5 8. The combination of claim 6, wherein the sleeve is coupled to an actuating lever.
9. The combination of claim 8, wherein the actuating lever extends through an opening in the handle.
- 10 10. The combination of claim 2, wherein the locking means comprises an actuating means, and said actuating means extends through an opening in the handle.
- 15 11. The combination of claim 2, wherein the handle comprises a two-part casing.
12. The combination of claim 2, wherein the proximal end of the handle comprises at least one broadening structure.
- 20 13. The combination of claim 2, wherein the first portion of the needle comprises an attachment means for a suture material or mesh tape.
14. The combination of claim 13, wherein the attachment means is located at the distal end of the surgical needle.
- 25 15. A handle and surgical needle combination for implanting a tape to treat female urinary incontinence, the handle comprising:  
a lumen for accepting a portion of the surgical needle; and  
30 a locking means having a first position for locking the surgical within the lumen and a second position allowing the surgical needle to be placed within or removed from the lumen; and the needle comprising:  
a first portion having attachment for accepting the tape;

a second portion having a noncircular cross-sectional area for insertion into the lumen.

16. The combination of claim 15 wherein the second portion of the surgical  
5 needle comprises a depression, which engages, in the first position, a locking  
element provided at the locking means.

17. The combination of claim 15, wherein the locking means comprises an  
actuating means, and said actuating means extends through an opening in the  
10 handle.

18. The combination of claim 13, wherein the attachment means is located at  
the distal end of the surgical needle.

15 19. A method for treating female urinary incontinence comprising the steps of:  
a) providing a curved needle element defining in part a curved shaft  
having a distal end and a proximal end; a tape for attaching to the  
needle; and a handle having a lumen for accepting a portion of the  
surgical needle and a locking means having a first position for  
20 locking the needle within the lumen and a second position allowing  
the needle to be placed within or removed from the lumen;  
b) locking the needle to the handle  
c) passing the needle into the body on one side of the urethra;  
d) attaching the tape to the needle and passing the needle and tape  
25 through the body;  
e) passing the needle into the body on the opposite side of the urethra;  
and  
f) attaching the tape to the needle and passing the needle and tape  
through the body to form a sling beneath the urethra.

30

20. The method of claim 19 wherein the needle is passed into the body in step  
(c) via the vagina.

21. The method of claim 19 wherein the needle is passed into the body in step (c) via the abdomen.

22. A kit for treating female urinary incontinence comprising:

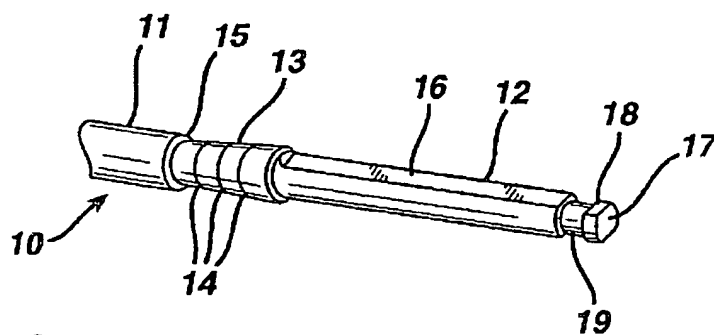
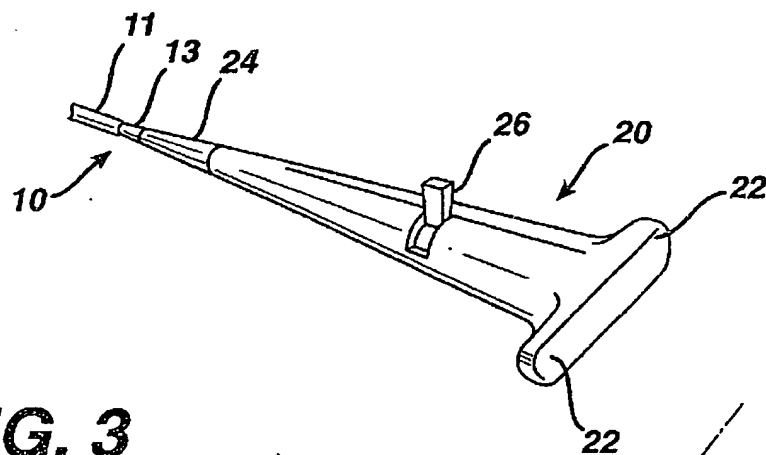
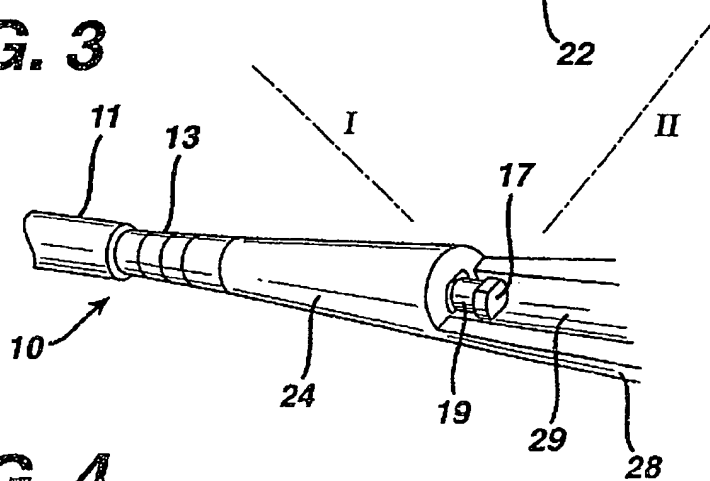
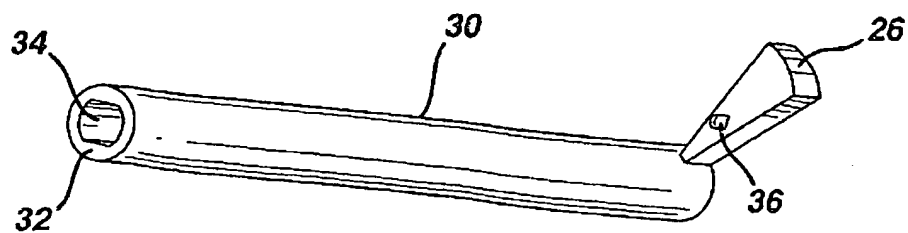
- 5           a)     at least one curved needle element defining in part a curved shaft having a distal end and a proximal end
- b)     a tape for attaching to the needle; and
- c)     at least one handle having a lumen for accepting a portion of the surgical needle and a locking means having a first position for
- 10           locking the needle within the lumen and a second position allowing the needle to be placed within or removed from the lumen.

23. A method for treating female urinary incontinence comprising the steps of:

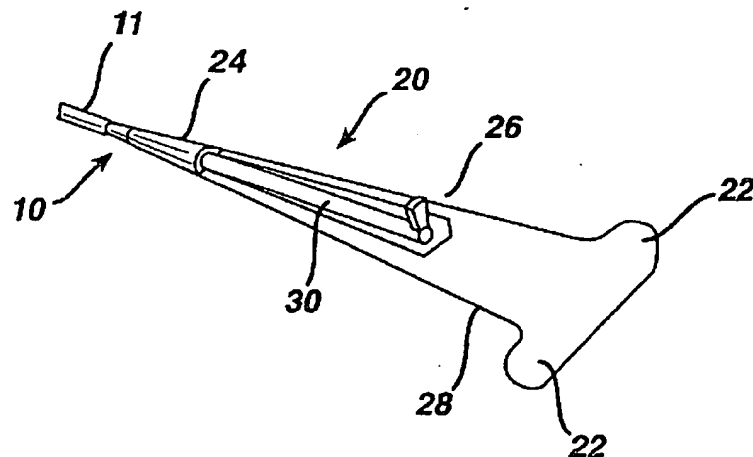
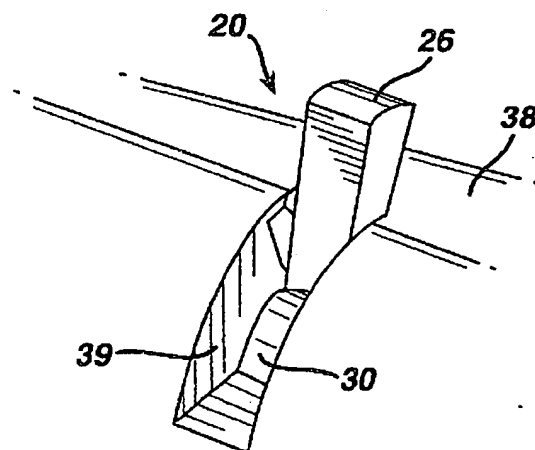
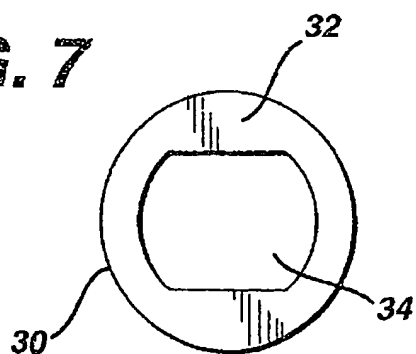
- 15           a) providing a first and second curved needle element each defining in part a curved shaft having a distal end and a proximal end; a tape for attaching to the needle; and a handle having a lumen for accepting a portion of the surgical needle and a locking means having a first position for locking the needle within the lumen and a second position allowing the needle to be placed within or removed from the lumen;
- 20           b) passing the first needle into the body on one side of the urethra;
- c) attaching the tape to the distal end of the first needle and passing the first needle and tape through the body;
- d) passing the second needle into the body on the opposite side of the urethra; and
- 25           e) attaching the tape to the distal end of the second needle and passing the needle and tape through the body to form a sling beneath the urethra.

24. The method of claim 23 wherein the needles are passed into the body in steps (b) and (d) via the abdomen.

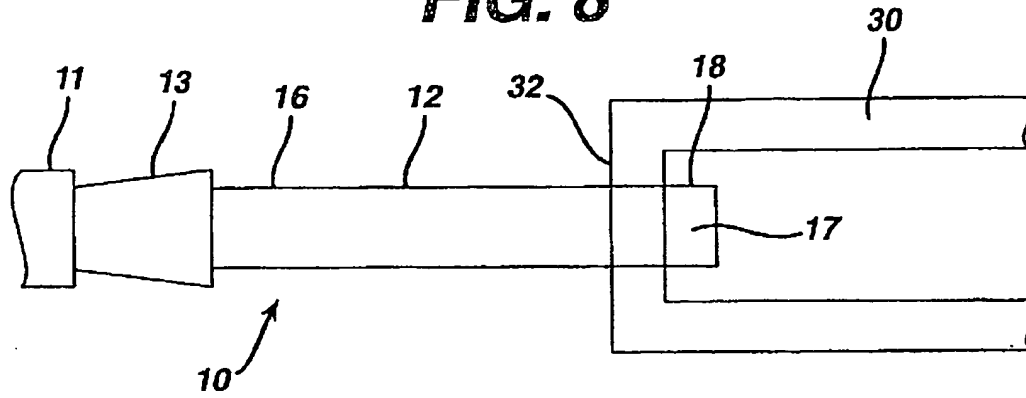
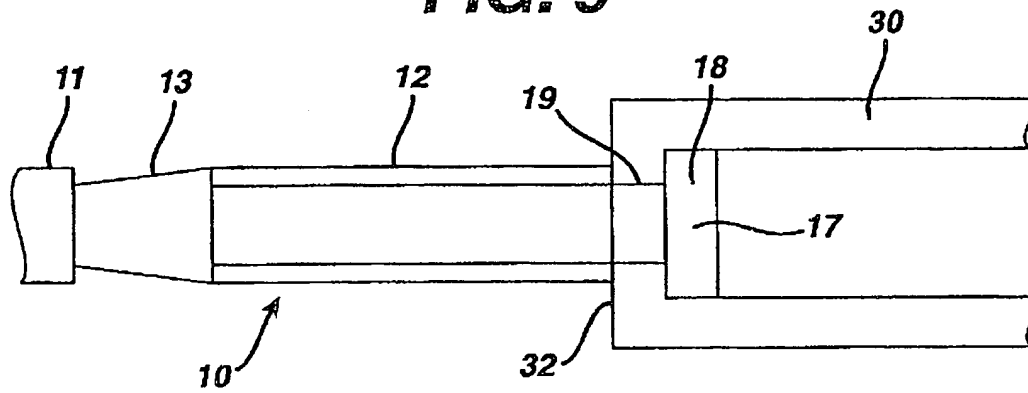
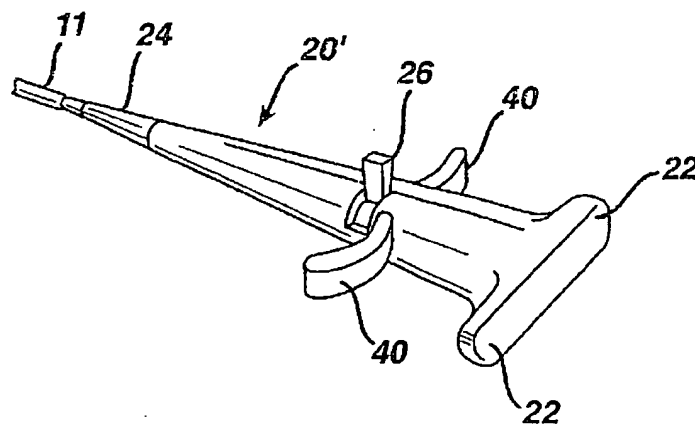
1/6

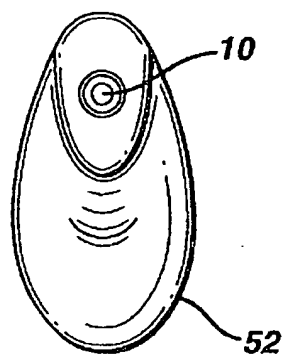
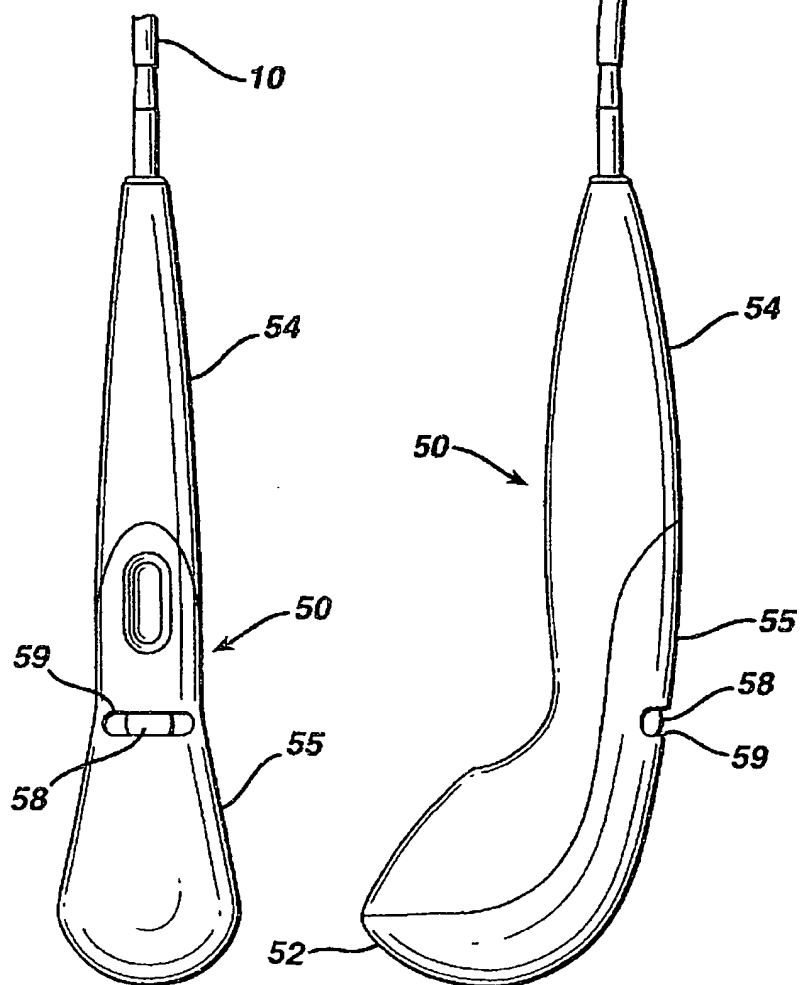
**FIG. 1****FIG. 2****FIG. 3****FIG. 4**

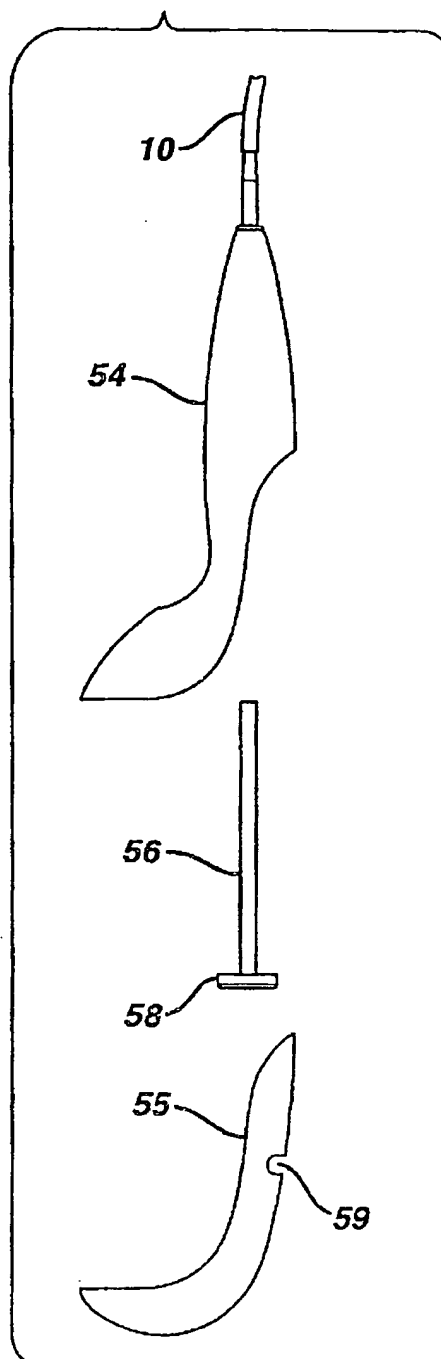
2/6

**FIG. 5****FIG. 6****FIG. 7**

3/6

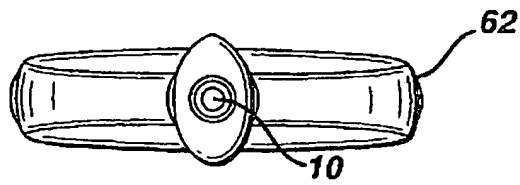
**FIG. 8****FIG. 9****FIG. 10**

**FIG. 11a****FIG. 11c****FIG. 11b**

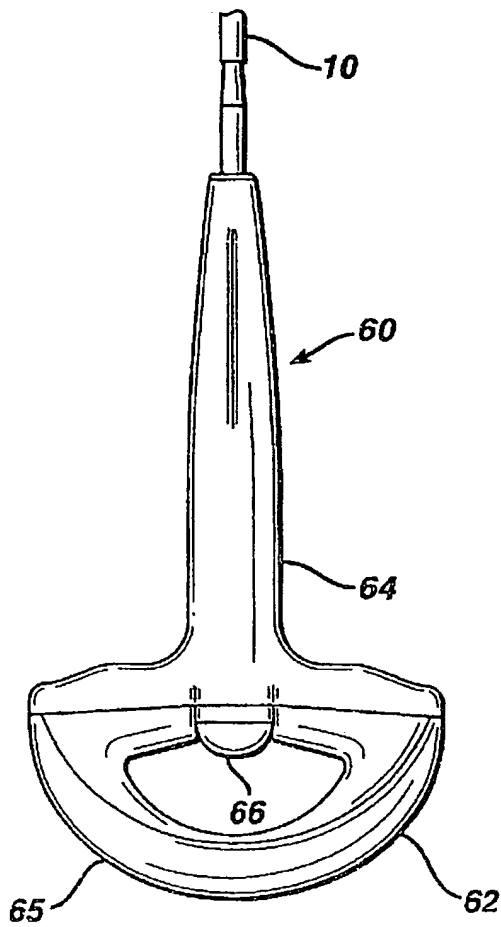
**FIG. 11d**

6/6

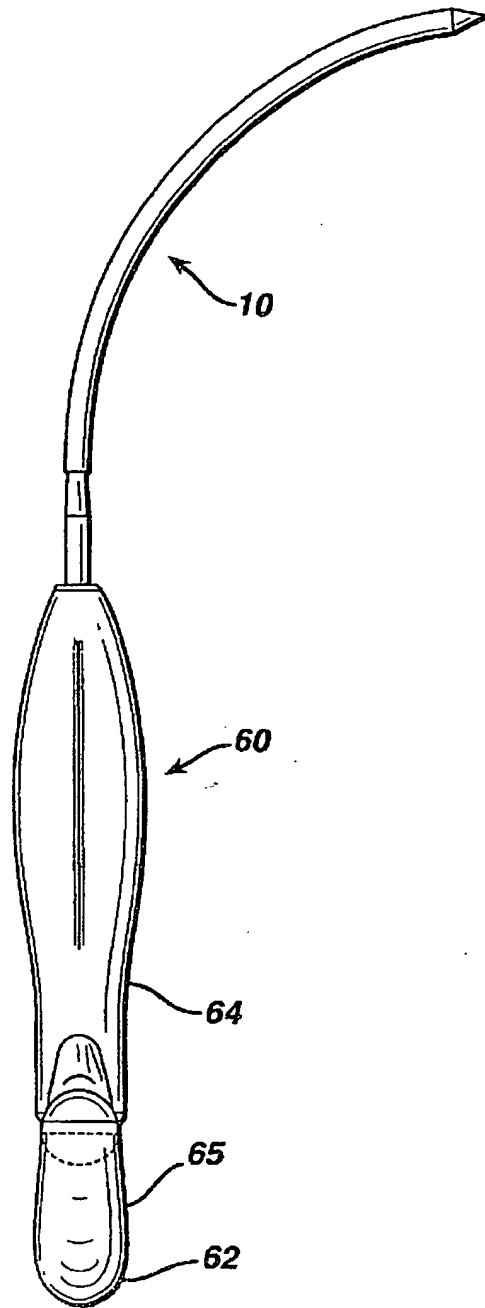
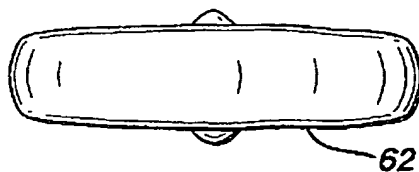
**FIG. 12a**



**FIG. 12b**



**FIG. 12c**



**FIG. 12d**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
2 May 2002 (02.05.2002)

PCT

(10) International Publication Number  
WO 02/034124 A3

(51) International Patent Classification<sup>7</sup>: A61B 17/04

(21) International Application Number: PCT/EP01/11988

(22) International Filing Date: 16 October 2001 (16.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/242,271 20 October 2000 (20.10.2000) US  
09/956,363 19 September 2001 (19.09.2001) US

(81) Designated States (*national*): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KL, KG, KP, KR, KZ, LC, LK, LR, LS, LI, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KI, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: ETHICON GMBH [DE/DE]; Robert-Koch-Strasse 1, 22851 Norderstedt (DE).

Published:  
— with international search report

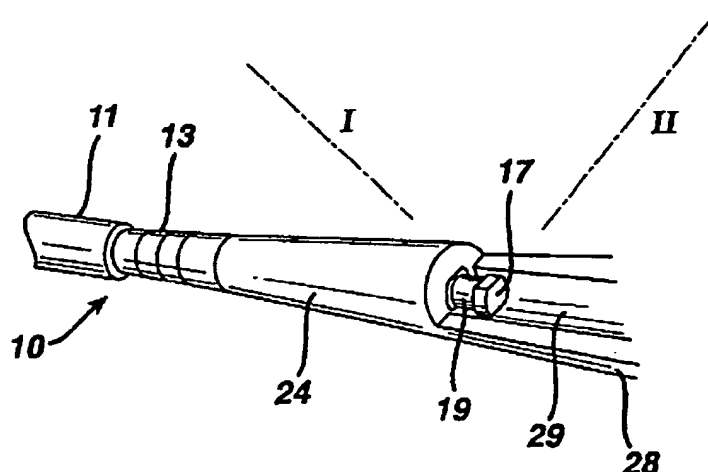
(72) Inventor: LANDGREBE, Susanne; Zuckerhut 3, 23867 Sülfeld (DE).

(88) Date of publication of the international search report:  
14 November 2002

(74) Agents: BOTH, Georg et al.; Uexküll & Stolberg, Beselerstrasse 4, 22607 Hamburg (DE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM WITH A SURGICAL NEEDLE AND A HANDLE



(57) Abstract: In a system with a surgical needle (10) and a handle (20), the surgical needle (10), in its proximal end region opposite the needle tip, comprises a support section which is adapted to be pushed in the handle (20). The handle (20) includes a lumen adapted to support the support section of the surgical needle (10) and a locking means (30, 26), which can be adjusted from a locking position, in which the support section is secured to the handle (20), to a release position, in which the support section can be pulled out of the lumen.

WO 02/034124 A3

## INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT/EP 01/11988

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61B17/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 474 565 A (TROTT A FRANK) 12 December 1995 (1995-12-12)	1-4, 10-15, 17, 18
A	column 3, line 7 -column 5, line 30; figures	5-9
X	US 5 323 765 A (BROWN MICHAEL G) 28 June 1994 (1994-06-28)	1
Y	figures 20-22	2-5, 10-18, 22
Y	US 5 899 909 A (ULMSTEN ULF ET AL) 4 May 1999 (1999-05-04) cited in the application column 2, line 58 -column 3, line 40; figures 1-3	2-5, 10-18, 22
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

12 July 2002

Date of mailing of the international search report

06/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Péru, L

## INTERNATIONAL SEARCH REPORT

Int. Patent Application No.

PCT/EP 01/11988

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 6 030 393 A (CORLEW EARVIN L) 29 February 2000 (2000-02-29) column 3, line 6 - line 44; figure 1  -----	1  2-4,10, 13-15, 17,18,22

# INTERNATIONAL SEARCH REPORT

national application No.  
PCT/EP 01/11988

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 19-21, 23-24  
because they relate to subject matter not required to be searched by this Authority, namely:  
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-18,22

Handle for needle

1.1. Claims: 2-14,18

with a needle with circular and non circular cross-sections

1.2. Claims: 15-17

with a needle with non-circular cross-section and attaching part

1.3. Claim : 22

with curved needle and tape

Please note that all inventions mentioned under item 1, although not necessarily linked by a common inventive concept, could be searched without effort justifying an additional fee.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/11988

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5474565	A	12-12-1995	US 5312422 A	17-05-1994
US 5323765	A	28-06-1994	AU 3235193 A WO 9310704 A1	28-06-1993 10-06-1993
US 5899909	A	04-05-1999	SE 503271 C2 SE 506164 C2 AU 697010 B2 AU 3402495 A CA 2198778 A1 CN 1161640 A ,B DE 69519737 D1 DE 69519737 T2 DK 778749 T3 EP 0778749 A1 ES 2152423 T3 JP 10506803 T SE 9402872 A WO 9606567 A1 AU 704712 B2 AU 7350296 A CA 2231155 A1 CN 1200658 A DE 69618650 D1 DK 854691 T3 EP 1151722 A2 EP 1159921 A2 EP 0854691 A1 JP 11514266 T JP 3229327 B2 RU 2161916 C2 SE 9503512 A WO 9713465 A1	29-04-1996 17-11-1997 24-09-1998 22-03-1996 07-03-1996 08-10-1997 01-02-2001 19-04-2001 05-02-2001 18-06-1997 01-02-2001 07-07-1998 01-03-1996 07-03-1996 29-04-1999 30-04-1997 17-04-1997 02-12-1998 28-02-2002 22-04-2002 07-11-2001 05-12-2001 29-07-1998 07-12-1999 19-11-2001 20-01-2001 10-04-1997 17-04-1997
US 6030393	A	29-02-2000	NONE	